


REV.	Description	Date
1	spec. revise	2011/2/16
2	rate voltage revise	2017/11/30

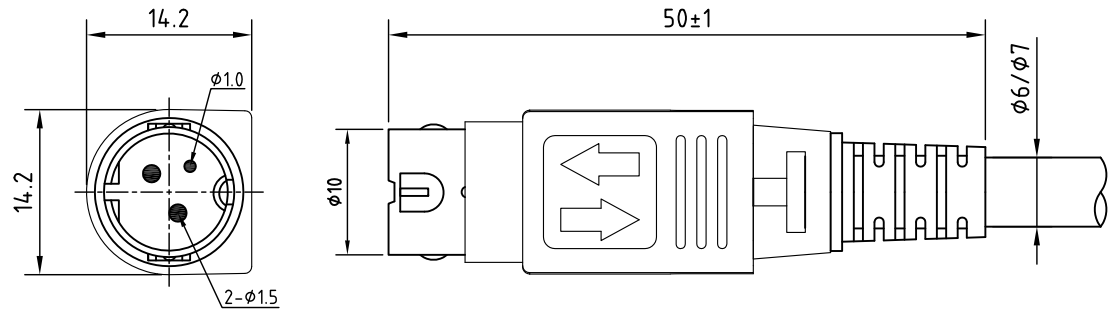

Specification

- Current rating: Large Pin 7.5A max.
Small Pin 1A max.
- Rated voltage: 48V/DC max.
- Contact resistance: Large Pin 30mΩ max.
Small Pin 50mΩ max.
- Insulation resistance: DC 250V 50MΩ min.
- Voltage withstand: AC 250V / 1 minute
- Insertion force: 3.5kgs max.
- Withdrawal force: 0.5-2.5Kgs

7	Trial	PVC	UL94V-0
6	Spring	Steel	
5	Cover	Brass	Nickel ptd.
4	Terminal/Core	Brass/PBT	Silver ptd./UL94V-0
3	Plastic ring	POM	
2	Body B	PC	UL94V-0
1	Body A	PC	UL94V-0
Item	Description	Material	Treat & Remark

RoHS
TOLERANCE X±0.5 X.X±0.3




Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2017/11/30	PART NO.	UT-A001-3P
DWN	GINA	REV.	2
CHK			
UNIT	MM		

ITEM	Circular Power Connector Push Lock Type
------	---

REV.	Description	Date
1,2	spec. revise	2011/2/16
3	withdrawal force revise	2011/6/9
4	rate voltage revise	2017/11/30

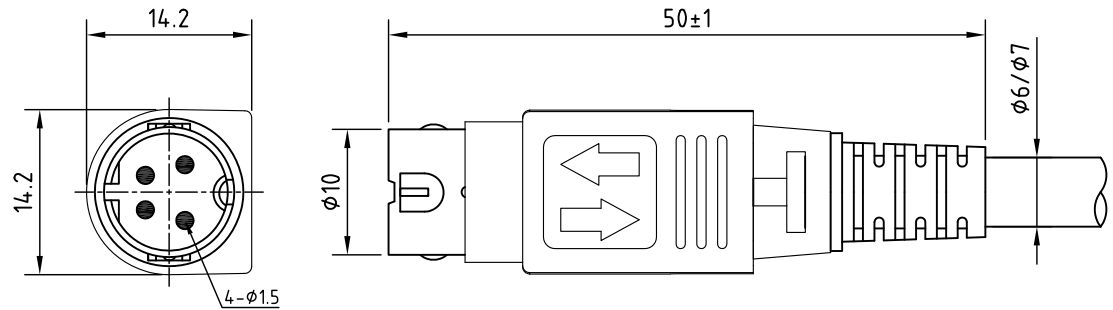

Specification

1. Current rating: 7.5A max.
2. Rated voltage: 48V/DC max.
3. Contact resistance: 30mΩ max.
4. Insulation resistance: DC 250V 50MΩ min.
5. Voltage withstand: AC 250V / 1 minute
6. Insertion force: 3.5kgs max.
7. Withdrawal force: 0.5-3.5Kgs

RoHS
TOLERANCE X±0.5 X.X±0.3

7	Trial	PVC	UL94V-0
6	Spring	Steel	
5	Cover	Brass	Nickel ptd.
4	Terminal/Core	Brass/PBT	Silver ptd./UL94V-0
3	Plastic ring	POM	
2	Body B	PC	UL94V-0
1	Body A	PC	UL94V-0
Item	Description	Material	Treat & Remark



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2017/11/30	PART NO.	UT-A001-4P
DWN	GINA	REV.	4
CHK			
UNIT	MM		

ITEM	Circular Power Connector Push Lock Type
------	---