


REV.	Description	Date
1	part no. revise	2016/10/27
2	spec. revise	2018/12/10

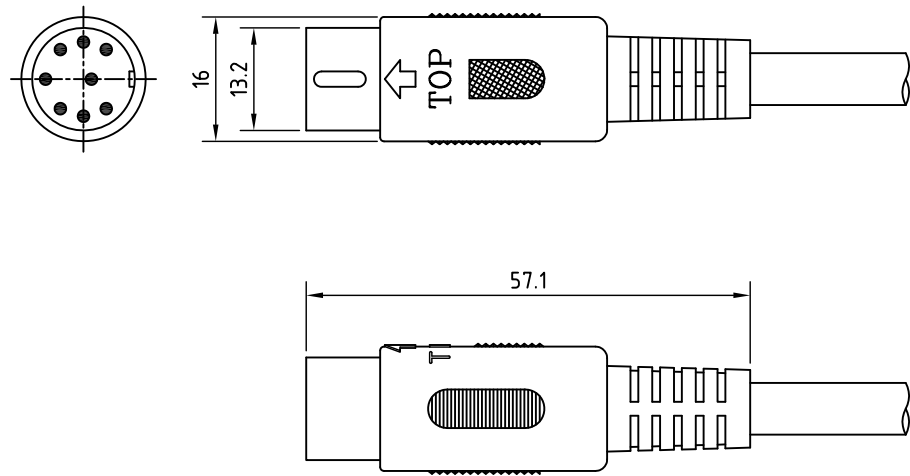

Specification

1. Current carrying capacity: 100V 4A
2. Contact resistance: 20mΩ max.
3. Insulation resistance: DC 500V 100MΩ min.
4. Dielectric strength: AC 800V / 1 minute

RoHS
TOLERANCE X±0.5 X.X±0.3

CONTACT ARRANGEMENT FRONT VIEW									
Angle	180°	216°	180°	240°	360°	240°	270°	270°	-
Pin No.	3P	4P	5P		6P	7P	8P	13P	

Unicable Co., Ltd. 國陽電業有限公司 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C. http://www.unicable.com.tw TEL:+886-2-2286-2122 FAX:+886-2-2286-1010	DATE	2018/12/10	PART NO.	UT-D010-XP
	DWN	GINA	REV.	2
	CHK			
ITEM	Molded DIN Connector Cable		UNIT	MM