


REV.	Description	Date
1	part no. revise	2016/10/27

Specification

1. Current carrying capacity: 12V DC 2A or 100V AC 2A max.
2. Contact resistance: 20mΩ max.
3. Insulation resistance: DC 500V 100MΩ min.
4. Dielectric strength: AC 800V / 1 minute

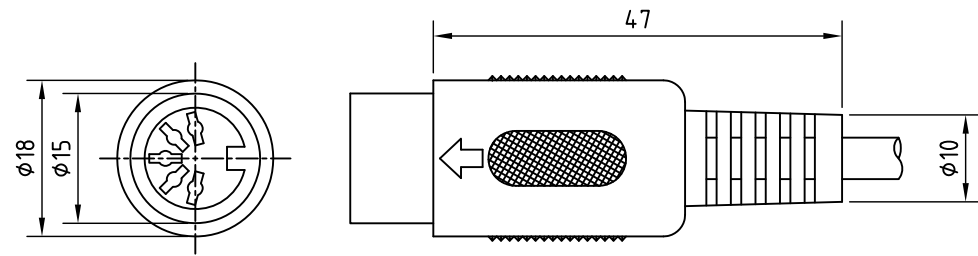

RoHS
TOLERANCE X±0.5 X.X±0.3

CONTACT ARRANGEMENT FRONT VIEW										
Angle	180°	216°	180°	240°	360°	240°	270°	270°	262°	-
Pin No.	3P	4P	5P		6P	7P	8P		13P	



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/27	PART NO.	UT-D025-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Molded DIN Connector Cable
------	----------------------------