


REV.	Description	Date
1	remove 9P arrangement	2016/1/4
2	part no. revise	2016/10/27

### Specification

1. Current carrying capacity: 12V DC 2A max.
2. Contact resistance: 30mΩ max.
3. Insulation resistance: DC 250V 50MΩ min.
4. Dielectric strength: AC 250V / 1 minute

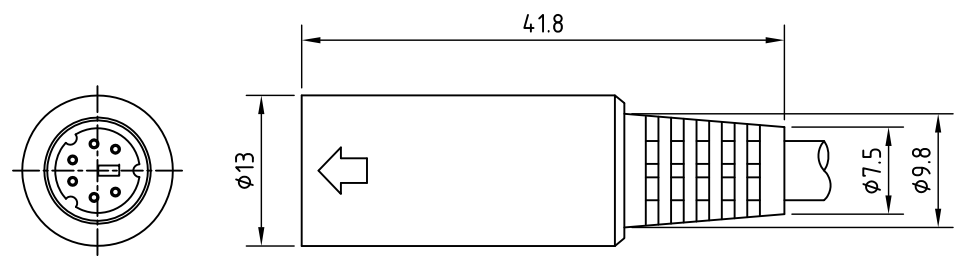

RoHS  
TOLERANCE X±0.5 X.X±0.3

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	3P	4P	5P	6P	7P	8P

 **Unicable Co., Ltd. 國陽電業有限公司**  
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/27	PART NO.	UT-D034-XP
DWN	GINA	REV.	2
CHK			
ITEM	Molded MINI DIN Connector Cable	UNIT	MM