


REV.	Description	Date

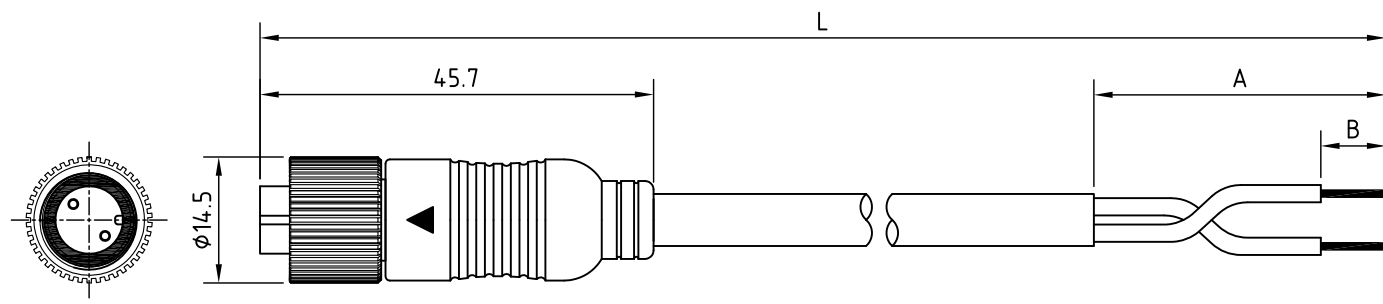

Specification of connector

General Characteristics

- Locking system : screw M12
- Termination : solder
- Shell protection : IP68
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

Materials

- Socket contact : brass
- Contact plating : gold
- Female insert : PA
- Ring nut : chromium plated
- O-ring : rubber

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

RoHS
UL-Recognized file No.E359387

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)				
	2P	3P	4P	5P
Rated voltage	250V			
Rated current	5A			



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D170F3-UC-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M12
------	----------------------