

REV.	Description	Date
1	upgrade drawing	2015/6/10

Specification of connector

General Characteristics


- Locking system : screw
- Termination : crimp moulded
- Shell protection : IP67
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

Materials

- Socket contact : brass
- Contact plating : gold
- Female insert : PA
- Ring nut : PA
- O-ring : rubber

Specification of cable

Material Jacket	PVC	PUR

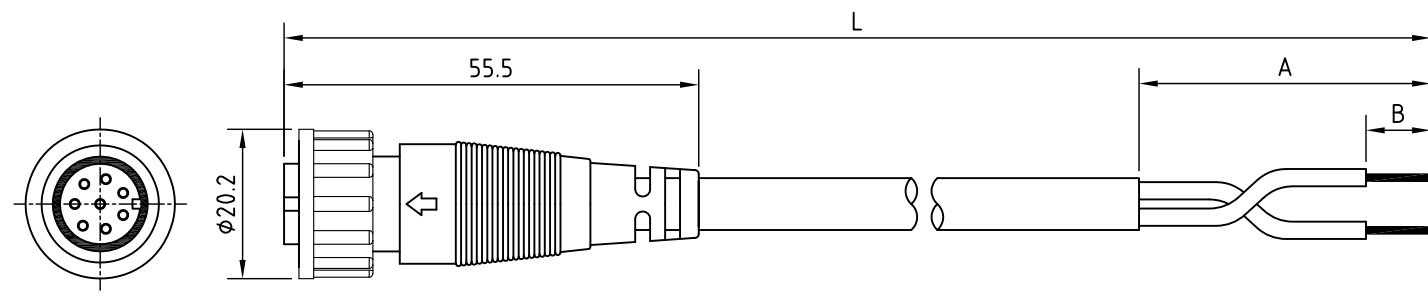

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P	6P	7P	8P
Rated voltage	250V			125V			
Rated current	5A			5A			



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D210F2-T-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	CIRCULAR CONNECTOR TYPE B
------	---------------------------