


REV.	Description	Date
1	upgrade drawing	2015/10/19
2	rated current revise	2018/10/5

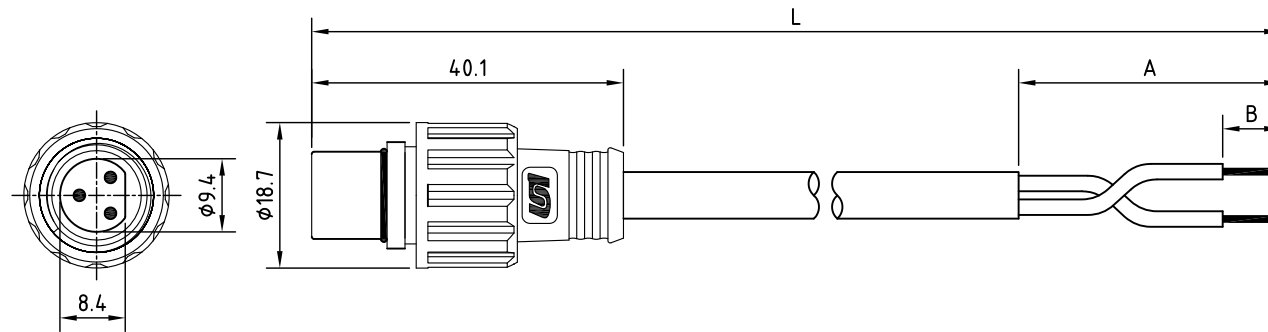

### Specification of connector

#### General Characteristics

Locking system : screw M15  
Termination : lathe/crimp, moulded  
Shell protection : IP68

#### Electrical Characteristics

Rated voltage : 250V  
Rated current : 5A  
Contact resistance :  $\leq 10\text{m}\Omega$   
Insulation resistance :  $>10\text{M}\Omega$

#### Materials

Pin contact : brass  
Contact plating : nickel plated  
Ring nut : PA  
O-ring : rubber

### Specification of cable

Material Jacket	PVC	PUR

RoHS



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

ITEM	In-Line Molded Cable M15	DATE	2018/10/5	PART NO.	UT-D2243-3P
		DWN	GINA	REV.	2
		CHK			
		UNIT	MM		