

REV.	Description	Date
1	upgrade drawing	2015/10/19
2	取消箭頭logo	2017/2/20
3	rated current revise	2018/10/5

Specification of connector

General Characteristics

Locking system : screw M15
Termination : lathe/crimp, moulded
Shell protection : IP68

Electrical Characteristics


Rated voltage : 250V
Rated current : 5A
Contact resistance : $\leq 10\text{m}\Omega$
Insulation resistance : $>10\text{M}\Omega$

Materials

Socket contact : brass
Contact plating : nickel plated

Specification of cable

Material Jacket	PVC	PUR

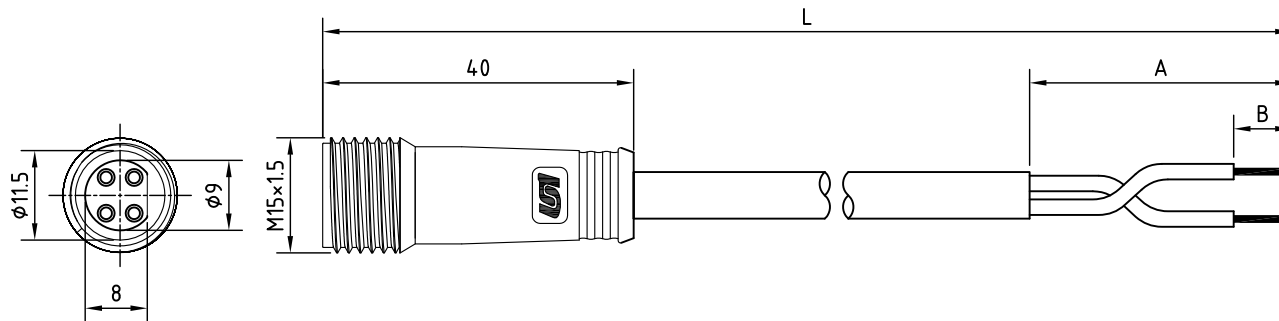

RoHS



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D2244-4P
DWN	GINA	REV.	3
CHK			
UNIT	MM		

ITEM

In-Line Molded Cable M15