

REV.	Description	Date
1	add 3-4PIN arrangement	2012/3/7
2	upgrade drawing	2014/3/21
3	rated voltage revise	2018/10/5


Specification of connector

General Characteristics

Locking system : screw M8
 Termination : solder
 Shell protection : IP68
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $\geq 10\text{M}\Omega$

Materials

Pin contact : brass
 Contact plating : gold
 Male insert : PA
 Ring nut : chromium plated

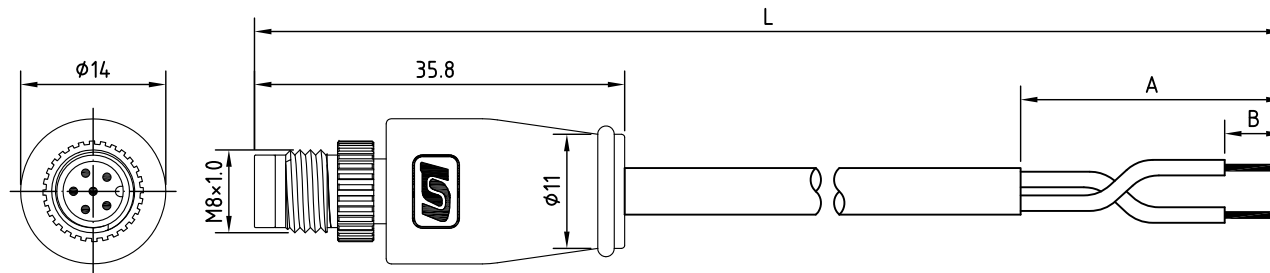

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)				
	3P	4P	5P	6P
Rated voltage	125V		60V	
Rated current	5A		2A	



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

ITEM	Sensor Connector M8	DATE	2018/10/5	PART NO.	UT-D241M3-XP
		DWN	GINA	REV.	3
		CHK			
		UNIT	MM		