

| REV. | Description | Date |
|------|------------------------|-----------|
| 1 | add 3-4PIN arrangement | 2012/3/7 |
| 2 | upgrade drawing | 2014/3/21 |
| 3 | rated voltage revise | 2018/10/5 |


Specification of connector

General Characteristics

Locking system : screw M8
 Termination : solder
 Shell protection : IP68
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $\geq 10\text{M}\Omega$

Materials

Pin contact : brass
 Contact plating : gold
 Male insert : PA
 Ring nut : PA

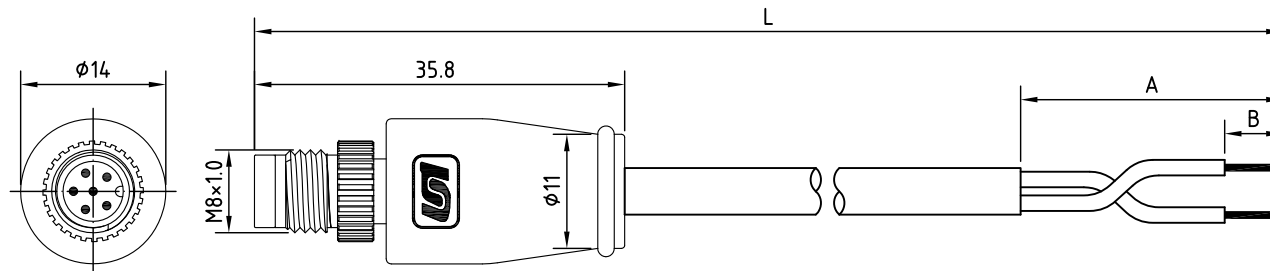

Specification of cable

| Material Jacket | PVC | PUR |
|-----------------|-----|-----|
| | | |

RoHS

| CONTACT ARRANGEMENT FRONT VIEW (MALE) | 3P | 4P | 5P | 6P |
|---------------------------------------|------|----|-----|----|
| Rated voltage | 125V | | 60V | |
| Rated current | 5A | | 2A | |



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

| | | | | | |
|------|---------------------|------|-----------|----------|--------------|
| ITEM | Sensor Connector M8 | DATE | 2018/10/5 | PART NO. | UT-D241M4-XP |
| | | DWN | GINA | REV. | 3 |
| | | CHK | | | |
| | | UNIT | MM | | |