

REV.	Description	Date
1	rated voltage revise	2018/10/5

Specification of connector

General Characteristics


Locking system	: screw M8
Termination	: lathe/crimp, moulded
Shell protection	: IP67
Rated voltage	: 125V
Rated current	: 5A
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $>10\text{M}\Omega$

Materials

Socket contact	: brass
Contact plating	: gold
Female insert	: PA
Ring nut	: PA
O-ring	: rubber


Specification of cable

Material Jacket	PVC	PUR

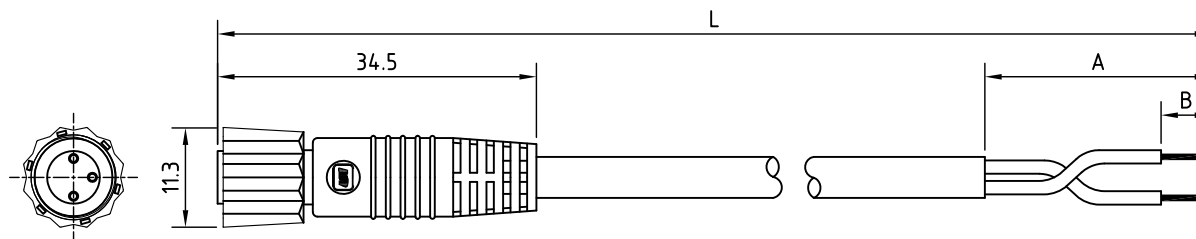

RoHS

CONTACT
ARRANGEMENT
FRONT VIEW
(FEMALE)



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-P209F2-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Sensor Connector M8
------	---------------------