

| REV. | Description | Date |
|------|------------------------|-----------|
| 1 | removed TUV recognized | 2023/3/20 |

Specification of connector

General Characteristics

Locking system : screw M8
Shell protection : IP66

Electrical Characteristics


Rated voltage : 600V
Rated current : 8A
Contact resistance : $\leq 10\text{m}\Omega$
Insulation resistance : $\geq 10\text{M}\Omega$

Materials

Socket contact : brass
Contact plating : nickel
Female insert : PA
Ring nut : PA
O-ring : rubber

Specification of cable

| | | |
|-----------------|-----|-----|
| Material Jacket | PVC | PUR |
|-----------------|-----|-----|

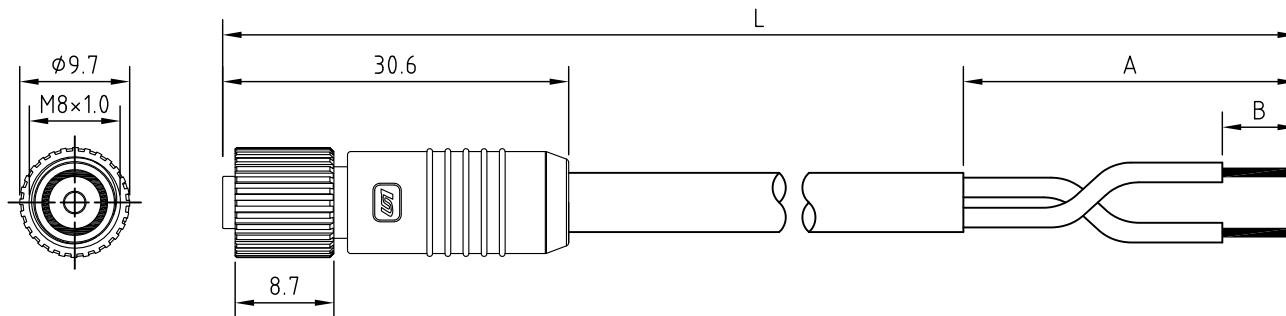

RoHS



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
http://www.unicable.com.tw Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

| | | | | | |
|------|---------------------|----------|----------------------------|------|----|
| ITEM | Sensor Connector M8 | PART NO. | 3011A-A06F1301P-01/UT-3971 | | |
| | | DATE | 2023/3/20 | UNIT | MM |
| | | DWN | GINA | REV. | 1 |
| | | CHK | | | |