


pin no.
 Part No. : UT-5256-XP-X
 1-cable OD : 5.5-6.5mm
 2-cable OD : 6.6-7.5mm
 3-cable OD : 7.6-8.5mm


REV.	Description	Date

Specification of connector

Locking system : Twist Lock
 Termination : solder
 Shell protection : IP68
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $\geq 10\text{M}\Omega$

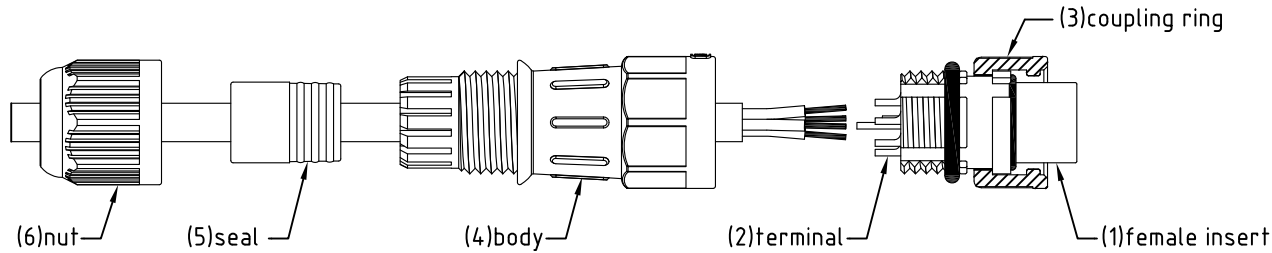

Cable preparation



RoHS
 TOLERANCE ± 0.5

6	Nut	PA
5	Seal	TPR
4	Body	PA
3	Coupling ring	PA
2	Terminal	Brass/Gold plated
1	Female insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4AP	4BP	5P	6P	7P	8P	10P	12P
Rated voltage	250V			250V	125V			60V		
Rated current	10A				5A			2A		

 **Unicable Co., Ltd. 國陽電業有限公司**
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5256-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------