

Part No. : UT-5260-XP-X


pin no.

1-cable OD : 7.5-8.5mm  
 2-cable OD : 8.6-9.5mm  
 3-cable OD : 9.6-10.5mm  
 4-cable OD : 10.6-11.5mm


REV.	Description	Date

Specification of connector

Locking system : Twist Lock  
 Termination : solder  
 Shell protection : IP68  
 Contact resistance :  $\leq 5m\Omega$   
 Insulation resistance :  $\geq 10M\Omega$

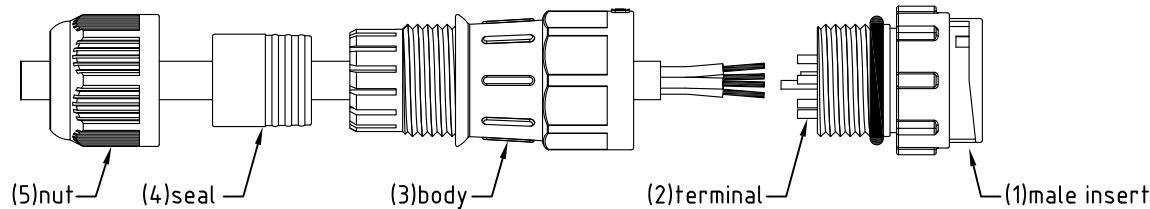

Cable preparation



RoHS  
 TOLERANCE  $\pm 0.5$

5	Nut	PA
4	Seal	TPR
3	Body	PA
2	Terminal	Brass/Gold plated
1	Male insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4P	5P	6P	7P	8P	2+8(10)P	3+6(9)P	19P
Rated voltage	360V		250V		125V		125V		60V	
Rated current	25A		15A		10A		25A/5A		5A	



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan  
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5260-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------