


pin no.
 Part No. : UT-5261-XP-X
 1-cable OD : 7.5-8.5mm
 2-cable OD : 8.6-9.5mm
 3-cable OD : 9.6-10.5mm
 4-cable OD : 10.6-11.5mm


REV.	Description	Date

Specification of connector

Locking system : screw M20.5
 Termination : solder
 Shell protection : IP68
 Contact resistance : ≤5mΩ
 Insulation resistance : ≥10MΩ

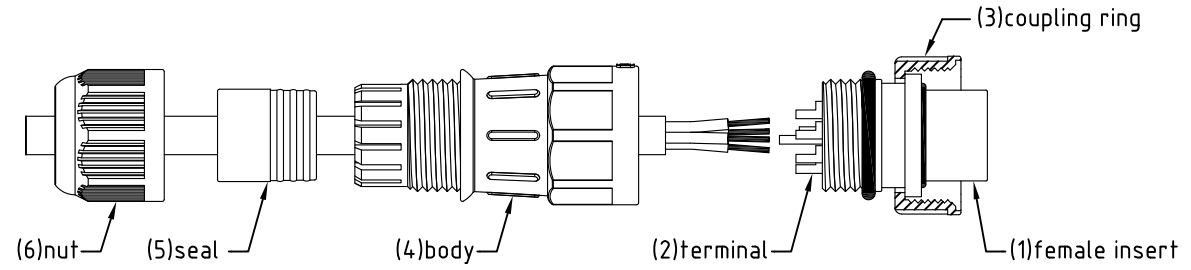

Cable preparation



RoHS
 TOLERANCE ±0.5

6	Nut	PA
5	Seal	TPR
4	Body	PA
3	Coupling ring	PA
2	Terminal	Brass/Gold plated
1	Female insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	360V		250V		125V		125V		60V		60V
	2P	3P	4P	5P	6P	7P	8P	2+8P	3+6P	19P	
Rated voltage	360V		250V		125V		125V		60V		60V
Rated current	25A		15A		10A		10A		25A/5A		5A



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5261-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------