

Part No. : UT-5266-XP-X


pin no.

- 1-cable OD : 5.5-6.5mm
- 2-cable OD : 6.6-7.5mm
- 3-cable OD : 7.6-8.5mm


REV.	Description	Date

Specification of connector

- Locking system : Quick Push Lock
- Termination : solder
- Shell protection : IP68
- Contact resistance : <10mΩ
- Insulation resistance : >10MΩ

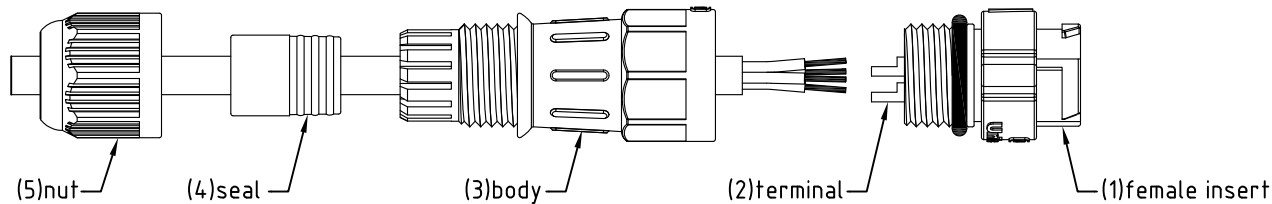

Cable preparation



RoHS
TOLERANCE ±0.5

5	Nut	PA
4	Seal	TPR
3	Body	PA
2	Terminal	Brass/Gold plated
1	Female insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P		3P		4P		5P		6P		7P		8P	
	Rated voltage	250V				250V				60V				
Rated current	10A				5A				5A					



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
http://www.unicable.com.tw Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5266-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Type J(J1): female conn. 2-8P
------	-------------------------------