

REV.	Description	Date
1	spec. revise	2012/11/12
2	upgrade drawing	2014/3/17

Specification of connector

General Characteristics


Locking system	: Push and Lock
Termination	: solder
Shell protection	: IP68
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $\geq 10\text{M}\Omega$

Materials


Socket contact	: brass
Contact plating	: gold
Female insert	: PA
Ring nut	: PA
O-ring	: rubber

Specification of cable

Material	Jacket	PVC	PUR
----------	--------	-----	-----

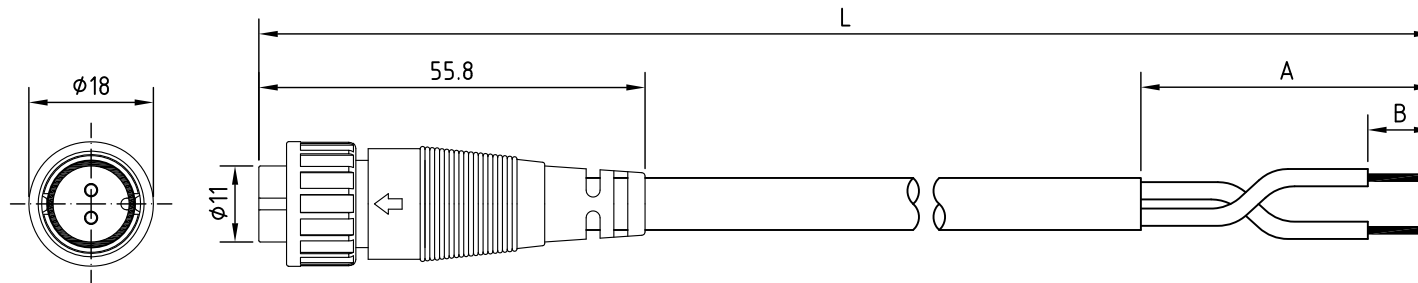

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)										
	2P	3P	4AP	4BP	5P	6P	7P	8P	10P	12P
Rated voltage	250V			250V	125V				60V	
Rated current	10A			5A				2A		



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D210F4-2-XP
DWN	GINA	REV.	2
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------