

REV.	Description	Date
1	spec. revise	2012/11/12
2	upgrade drawing	2014/3/17

Specification of connector

General Characteristics


Locking system	: Push and Lock
Termination	: solder
Shell protection	: IP68
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $\geq 10\text{M}\Omega$

Materials

Pin contact	: brass
Contact plating	: gold
Male insert	: PA
Ring nut	: PA
O-ring	: rubber

Specification of cable

Material	Jacket	PVC	PUR
----------	--------	-----	-----

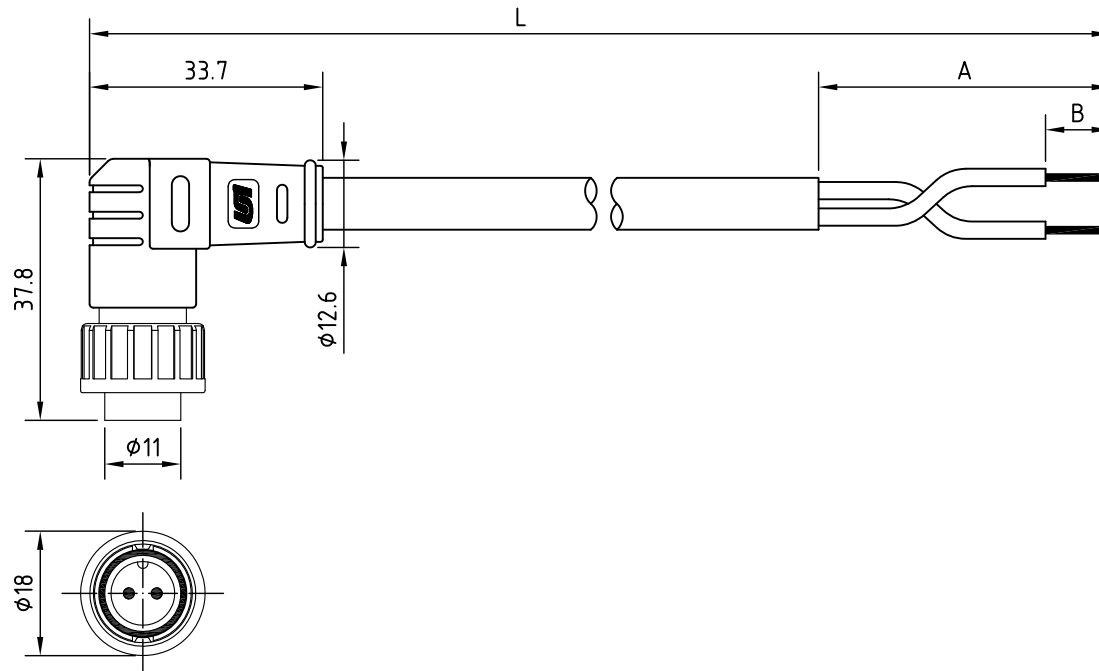

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)		
	2P	3P
Rated voltage	250V	
Rated current	10A	



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
http://www.unicable.com.tw TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

ITEM	Sensor Connector M15.5	DATE	2016/10/7	PART NO.	UT-D231M4-2-XP
		DWN	GINA	REV.	2
		CHK			
		UNIT	MM		