

REV.	Description	Date
1	add 3~8PIN arrangement	2012/3/23
2	upgrade drawing	2014/3/26
3	add 19P arrangement	2016/3/4
4	rated current revise	2018/10/5

### Specification of connector

#### General Characteristics


Locking system : screw M20.5  
 Termination : solder  
 Shell protection : IP68  
 Contact resistance :  $\leq 5\text{m}\Omega$   
 Insulation resistance :  $\geq 10\text{M}\Omega$

#### Materials

Socket contact : brass  
 Contact plating : gold  
 Female insert : PA

### Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

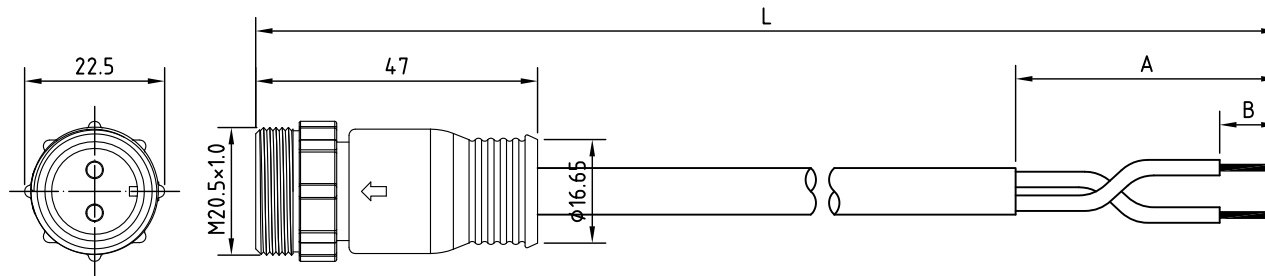

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P	6P	7P	8P	2+8(10)P	3+6(9)P	19P
Rated voltage	360V		250V		125V	125V		60V		60V
Rated current	25A		15A		10A		25A/5A		5A	



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D264F2-XP
DWN	GINA	REV.	4
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------